


FERROTEC CONFIDENTIAL

- 1) The resistance of the module shall be within 1.386-1.686 ohms at an ambient temperature of 25 degrees Celsius.
- 2) Material of lead wires: #30 AWG Tinned Single Strand.
- 3) All the surfaces of module have been plated gold.

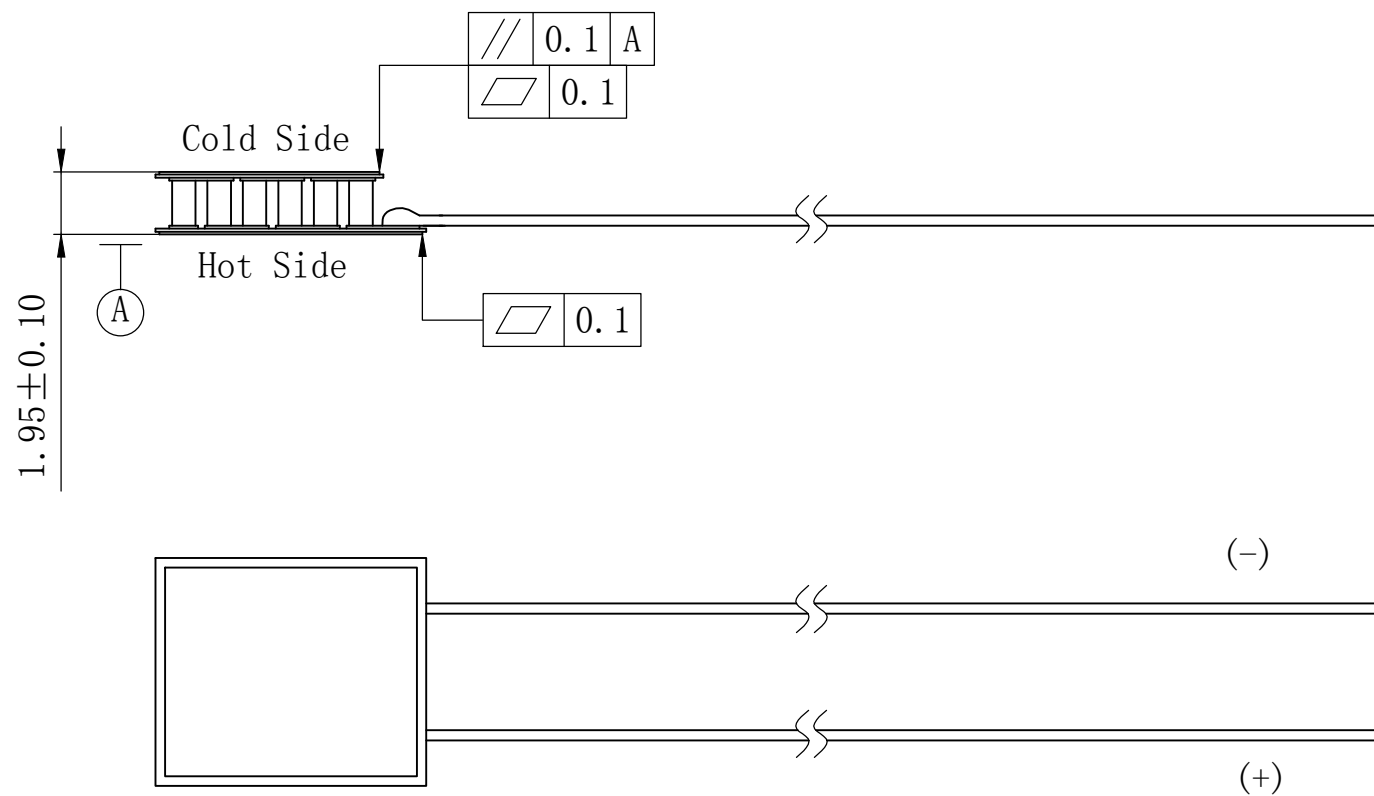

ROHS COMPLIANCE

Item	Value	Test Conditions
I _{max}	1.2A	Q _c =0, DT=DT _{max} , Th=50°C
V _{max}	2.7V	Q _c =0, I=I _{max} , Th=50°C
DT _{max}	80°C	Q _c =0, I=I _{max} , Th=50°C
Q _{cmax}	1.7W	I=I _{max} , DT=0, Th=50°C
Th _{max}	200°C	Momentary

Ferrotec Corporation
 (Zhijiang Factory)
 668# Binkang Road, Hangzhou Hi-tech
 Garden, Zhejiang Province, P.R.China

General Dimension Tolerance			PLs	Date Modifying	Summary Of Modification	By	Designed	2014-6-5	Finished Mark	Title	Proj.
Process	Cutting		Forging				Jiang	2014-6-5	Material	20033/018/012M	3
	Common	Special					Common				
Size Range	less than 6	±0.1	±0.15	±0.5			yongqing Wu	2014-6-5	Finish	Drawing Number	1/1
	6 up to 30	±0.2					Approved		Raw Material Size	T1406-1400	1
	30 up to 120	±0.3	±0.2	±0.7			Approved				
	120 up to 315	±0.5	±0.25	±1.0				Approved	Raw Material Weight	8B308	Z
	315 up to 1000	±0.8	±0.4	±1.5				Approved			
1000 up to 2000	±1.2	±0.6	±2.0				FTA		Scale: Do Not Scale	Rev.	