


FERROTEC CONFIDENTIAL

- 1). The resistance of the module is within 1.372 to 1.675 ohms at an ambient temperature of 25 degrees Celsius;
- 2). Material of lead wires: #22 AWG Tinned Single Strand.
- 3). All the substrates are ALN.
- 4). Both side of module have been metallized.

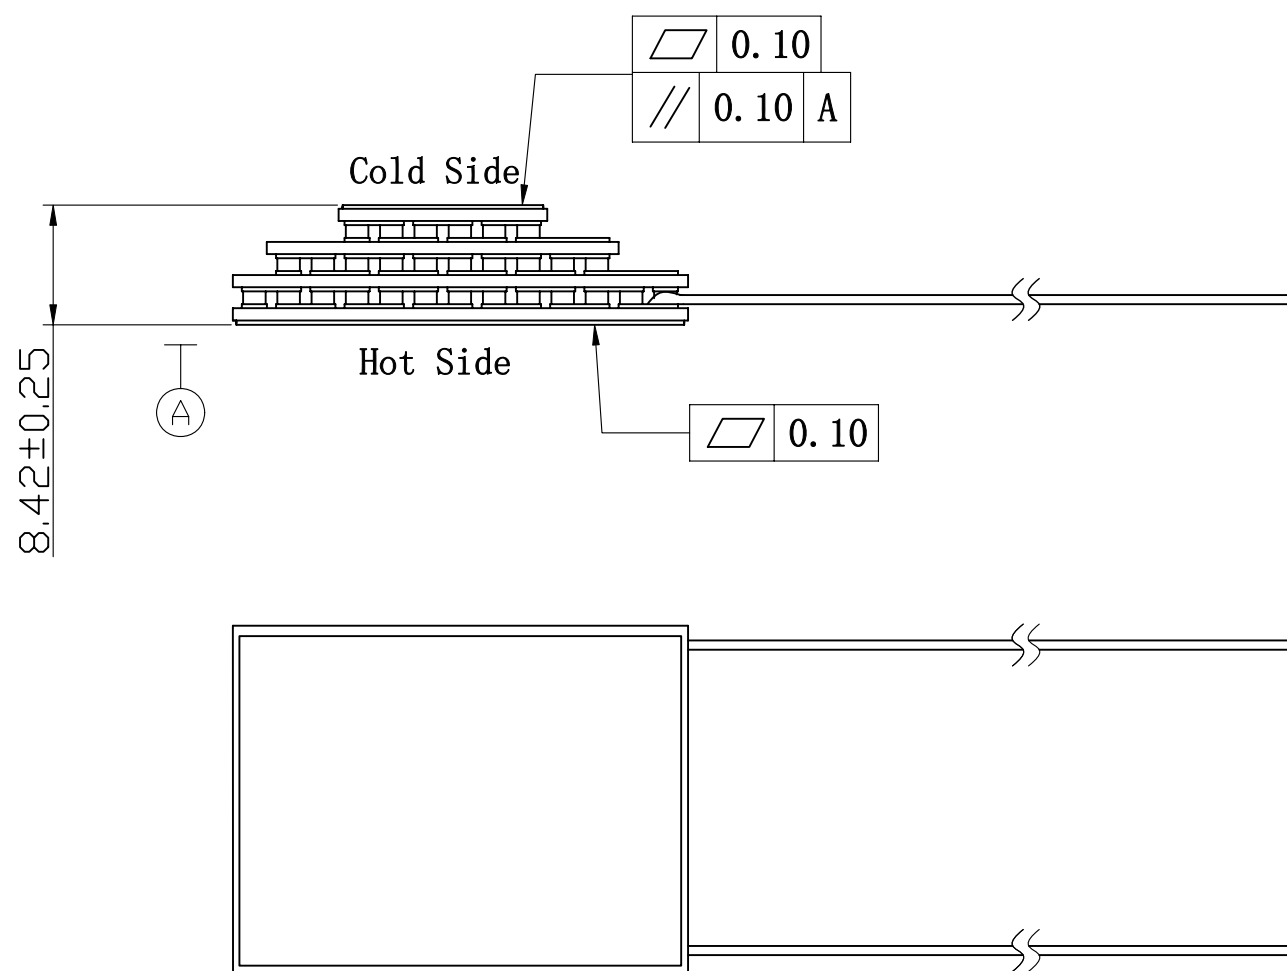

Item	Value	Conditions
I _{max}	4.7A	Q _c =0, DT=DT _{max} , Th=50°C
V _{max}	9.3V	Q _c =0, I=I _{max} , Th=50°C
DT _{max}	123°C	Q _c =0, I=I _{max} , Th=50°C
Q _{cmax}	7.0W	I=I _{max} , DT=0, Th=50°C
Th _{max}	200°C	Momentary

Ferrotec Corporation
 (Zhijiang Factory)
 668# Binkang Road, Hangzhou Hi-tech
 Garden, Zhejiang Province, P.R. China

General Dimension Tolerance			Pls	Date	Modifying	Summary Of Modification	By
Process	Cutting	Forging					
Size Range	Common	Special	Common				
	less than 6	±0.1					
6 up to 30	±0.2	±0.15	±0.5				
30 up to 120	±0.3	±0.2	±0.7				
120 up to 315	±0.5	±0.25	±1.0				
315 up to 1000	±0.8	±0.4	±1.5				
1000 up to 2000	±1.2	±0.6	±2.0				

Designed	2013.1.18	Finished Mark
Lu Jiejian		
Checked	2013.1.18	Material
Wu Yongqing		
FTH	Approved	Finish
FT	Approved	Raw Material Size
ITL	Approved	Raw Material Weight

Title	2030/106/047MN	Proj.
		3
Drawing Number	T1001-0100	Angle
		1/1
P/N	85307	Rev.
		Z
		Scale Do Not Scale

Scale	Do Not Scale